

DEEP BLUE 3.0 Pro

Mono

565W MBB Bifacial Mono PERC
Half-cell Double Glass Module
JAM72D30 540-565/GB Series

Introduction

Assembled with 11BB bifacial PERC cells and gapless ribbon connection technology, these double glass modules have the capability of converting the incident light from the rear side together with the front side into electricity, providing higher output power, lower temperature coefficient, less shading loss, as well as enhanced tolerance for mechanical loading.



Higher output power



More reliable, more stable power generation



Less shading effect




Lower temperature coefficient

Superior Warranty

- 12-year product warranty
- 30-year linear power output warranty

0.45% Annual Degradation Over 30 years

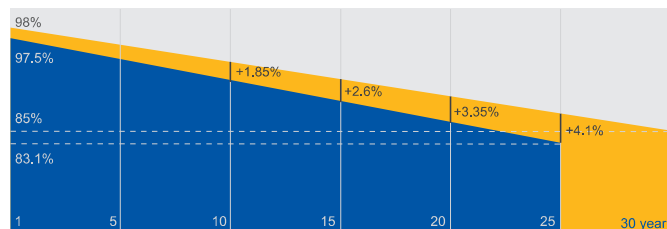

■ Bifacial double glass module linear power warranty


■ Standard module linear power warranty

Comprehensive Certificates

- IEC 61215, IEC 61730, UL 61215, UL 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- ISO 45001: 2018 Occupational health and safety management systems
- IEC TS 62941: 2016 Terrestrial photovoltaic (PV) modules – Guidelines for increased confidence in PV module design qualification and type approval



MECHANICAL DIAGRAMS

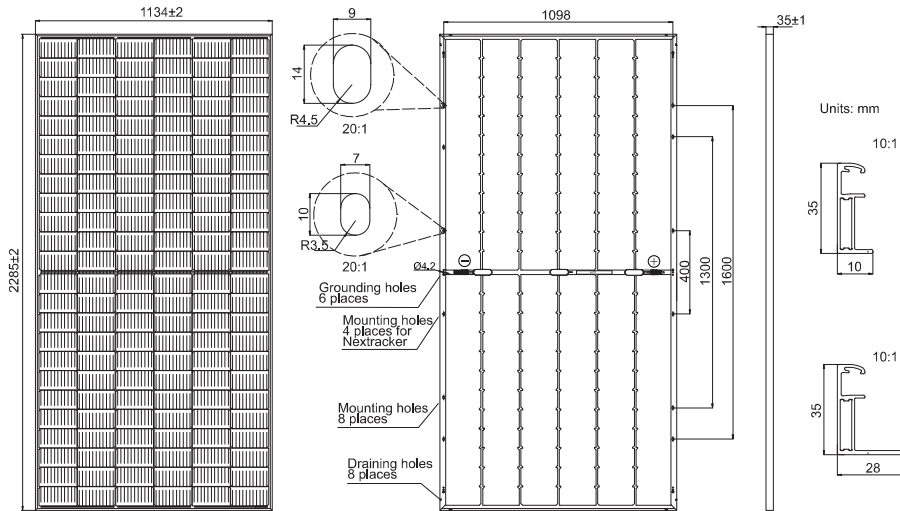

Remark: customized frame color and cable length available upon request

SPECIFICATIONS

Cell	Mono
Weight	31.6kg±3%
Dimensions	2285±2mm×1134±2mm×35±1mm
Cable Cross Section Size	4mm ² (IEC), 12 AWG(UL)
No. of cells	144(6×24)
Junction Box	IP68, 3 diodes
Connector	QC 4.10-35
Cable Length (Including Connector)	Portrait:300mm(+)/400mm(-); Landscape:1300mm(+)/1300mm(-)
Front Glass/Back Glass	2.0mm/2.0mm
Packaging Configuration	31pcs/Pallet 620pcs/40HQ Container

ELECTRICAL PARAMETERS AT STC

TYPE	JAM72D30 -540/GB	JAM72D30 -545/GB	JAM72D30 -550/GB	JAM72D30 -555/GB	JAM72D30 -560/GB	JAM72D30 -565/GB
Rated Maximum Power(P _{max}) [W]	540	545	550	555	560	565
Open Circuit Voltage(V _{oc}) [V]	49.60	49.75	49.90	50.02	50.15	50.28
Maximum Power Voltage(V _{mp}) [V]	41.64	41.80	41.96	42.11	42.27	42.42
Short Circuit Current(I _{sc}) [A]	13.86	13.93	14.00	14.07	14.14	14.21
Maximum Power Current(I _{mp}) [A]	12.97	13.04	13.11	13.18	13.25	13.32
Module Efficiency [%]	20.8	21.0	21.2	21.4	21.6	21.8
Power Tolerance	0~+5W					
Temperature Coefficient of I _{sc} (α _{Isc})	+0.045%/°C					
Temperature Coefficient of V _{oc} (β _{Voc})	-0.275%/°C					
Temperature Coefficient of P _{max} (γ _{Pmp})	-0.350%/°C					
STC	Irradiance 1000W/m ² , cell temperature 25°C, AM1.5G					

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.

ELECTRICAL CHARACTERISTICS WITH DIFFERENT POWER RANGES
(REFERENCE TO 10% SOLAR ILLUMINANCE RATIO)


TYPE	JAM72D30 -540/GB	JAM72D30 -545/GB	JAM72D30 -550/GB	JAM72D30 -555/GB	JAM72D30 -560/GB	JAM72D30 -565/GB	Maximum System Voltage	1500V DC
Rated Max Power(P _{max}) [W]	578	583	589	594	599	605	Operating Temperature	-40°C~+85°C
Open Circuit Voltage(V _{oc}) [V]	49.93	50.03	50.21	50.31	50.45	50.55	Maximum Series Fuse Rating	30A
Max Power Voltage(V _{mp}) [V]	41.65	41.78	41.95	42.11	42.26	42.42	Maximum Static Load, Front*	5400Pa(112 lb/ft ²)
Short Circuit Current(I _{sc}) [A]	14.83	14.91	14.98	15.05	15.13	15.20	Maximum Static Load, Back*	2400Pa(50 lb/ft ²)
Max Power Current(I _{mp}) [A]	13.88	13.95	14.03	14.10	14.18	14.25	NOCT	45±2°C
							Bifaciality**	70%±10%
							Fire Performance	UL Type 29

*For NexTracker installations, Maximum Static Load, Front is 2400Pa while Maximum Static Load, Back is 2400Pa.


**Bifaciality=P_{max, rear}/Rated P_{max, front}

CHARACTERISTICS

Current-Voltage Curve JAM72D30-555/GB



Power-Voltage Curve JAM72D30-555/GB



Current-Voltage Curve JAM72D30-555/GB

